

4K H.265 Pro NVR 7000 Series

4K+H.265

4K	H.265 HEVC	ONVIF	HDMI	VGA	Audio Out	Alarm In/Out
Multi-video Transcoding Output	Transcoding	ANR	RAID	N+1 Hot Spare	ANPR	VCA
Online Upgrade	P2P	HTML5				



MS-N7016-UH/MS-N7032-UH

DATASHEET

KEY FEATURES

- ▶ **Powerful Decoding Capacity** (Maximum supporting 16*1080P or 32*720P network cameras viewing at the same time.)
- ▶ **HDMI & VGA** (Providing both HDMI and VGA ports for users to choose according to their monitor types.)
- ▶ **4*3.5" HDD** (4 SATA of 3.5" HDD, providing 10TB capacity for each HDD, up to 40TB total hard disk storage.)
- ▶ **Dual LAN Interfaces** (Designed for three network working modes as Multi-address, Load Balance and Net Fault-tolerance.)
- ▶ **Video Content Analysis** (With 10 detection modes, VCA greatly enhances the performance bringing comprehensive surveillance functions.)
- ▶ **ANR** (Can automatically replenish the recording gap due to internet interruptions (by storing at the edge).)
- ▶ **N+1 Hot Spare** (A backup mechanism which ensures the monitoring system uninterrupted working.)

H.265+H.264

Smartly figure out and switch between H.264 and H.265 automatically. It will extend the days to save recording file with H.265 than with other compressions.



Powerful Decoding Capacity

Maximum support up to 16*1080P or 32*720P network cameras viewing at the same time.



Multi-video Output

Independent Outputs: Multiple outputs to display various channels independently.
Synchronous Outputs: The same channel to be displayed at different locations synchronously.



RAID 0/1/5/6/10

RAID (Redundant Array of Independent Disks) is a method of combining hard disks as a logical unit to achieve redundancy and greater speed of writing and reading data.

RAID Type	No. of hard disk drives required	Total Storage Space
RAID 10	4, 6, 8	n/2
RAID 6	≥ 4	n-2
RAID 5	≥ 3	n-1
RAID 1	2	n/2
RAID 0	≥ 2	n





Model		MS-N7016-UH	MS-N7032-UH
Video/Audio Input	Network Video Input	16-CH	32-CH
	Bandwidth	Incoming 160Mbps Outgoing 160Mbps	256Mbps or 200Mbps(when RAID is enabled) 256Mbps or 200Mbps(when RAID is enabled)
Video/Audio Output	HDMI Output	1-CH, Resolution: 3840x2160/60Hz, 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output	
	VGA Output	1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
	Dual Stream	Support	
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF	
Synchronous Playback	4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps @3MP), 16*(30fps @1080P), 16*(30fps @720P)	4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps@3MP), 16*(30fps@1080P), 32*(30fps@720P)	
Video/Audio Compression	Video Compression	H.265*/H.265(HEVC)/H.264*/H.264	
	Audio Compression	G.711/AAC/G.722/G.726	
	Sample Rate	8KHz/16KHz	
	Synchronous Recording	16*5MP	32*5MP
Storage	SATA	4*SATA HDD(3.5")	
	Capacity	Up to 10TB capacity for each HDD	
Disk Array	Array Type	RAID0, RAID1, RAID5, RAID6, RAID10	
Recording Management	Recording Type	Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)	
	Snapshot Type	Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)	
	Playback Type	General Playback, Event Playback, Tag Playback, Split Playback, Picture Playback	
Backup	Backup	Video Backup, Image Backup	
Network	Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS	
External Interface	Network Interface	2*RJ45 10/100/1000Mbps	
	Serial Interface	1*RS-485 Series Port for PTZ	
		1*RS-232 Series Port for Console	
		1*RS-485 Series Port for Keyboard	
	USB Interface	1*USB 3.0; 2*USB 2.0	
	Audio Input/Output	1*RCA/1*RCA	
Alarm Input/Output	16-CH/4-CH		
General	Compatibility	ONVIF, API	
	Advanced Function	ANR, N+1 Hot Spare	
	ANPR	Support	
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed	
	Keyboard Control	Milesight Keyboard (MS-K01)	
	Power Supply	AC 100V~240V 50Hz~60Hz	
	Consumption	≤15W(Without HDD)	
	Working Conditions	Temperature: -10℃~55℃/Humidity: 10%~90%	
	Dimensions	Rack Mountable Chassis (1.5U Standard) 440mm(W)X320mm(D)X66.8mm(H)	
	Weight	4.1Kg	
Warranty	3/5 Years		

4K H.265 Pro NVR 7000 Series



Interfaces

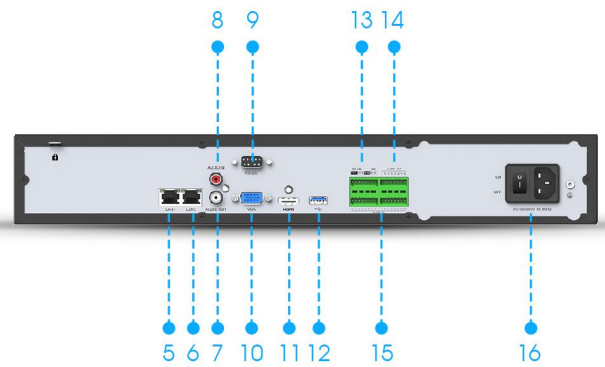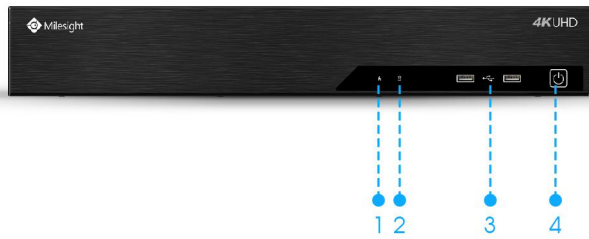


- 1. Run Indicator 2. HDD Indicator 3. USB 4. Power Light
- 5. LAN1 6. LAN2 7. Audio Out 8. Audio In
- 9. RS-232 10. VGA 11. HDMI 12. USB 13. RS-485 14. Alarm Out 15. Alarm In 16. Power

Installation of HDDs




Structure Diagrams

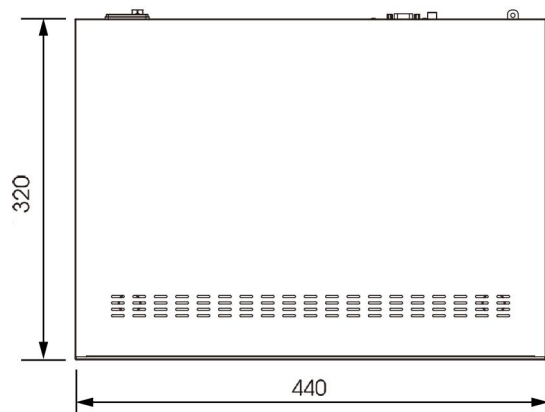

Units: mm

Naming Convention



Milesight Technology Co.,Ltd. | www.milesight.com

Contact Us: sales@milesight.com support@milesight.com

Add: 220 NE 51st Street, Oakland Park, Florida 33334, USA
Tel: +1-800-561-0485

Add: 925, Anyang SK V1 Center, LS-ro 116beon-gil, Dongan-gu, Anyang-si, Korea
Tel: +82-31-990-7732

Add: No.23 Wanghai Road, 2nd Software Park, Xiamen, China
Tel: +86-592-5922772

